


IMPORTANT! REFER TO PRODUCT MANUAL FOR A COMPLETE DESCRIPTION OF INSTALLATION, PLACEMENT AND CUT-OUT.

ENCLOSED STRUCTURE

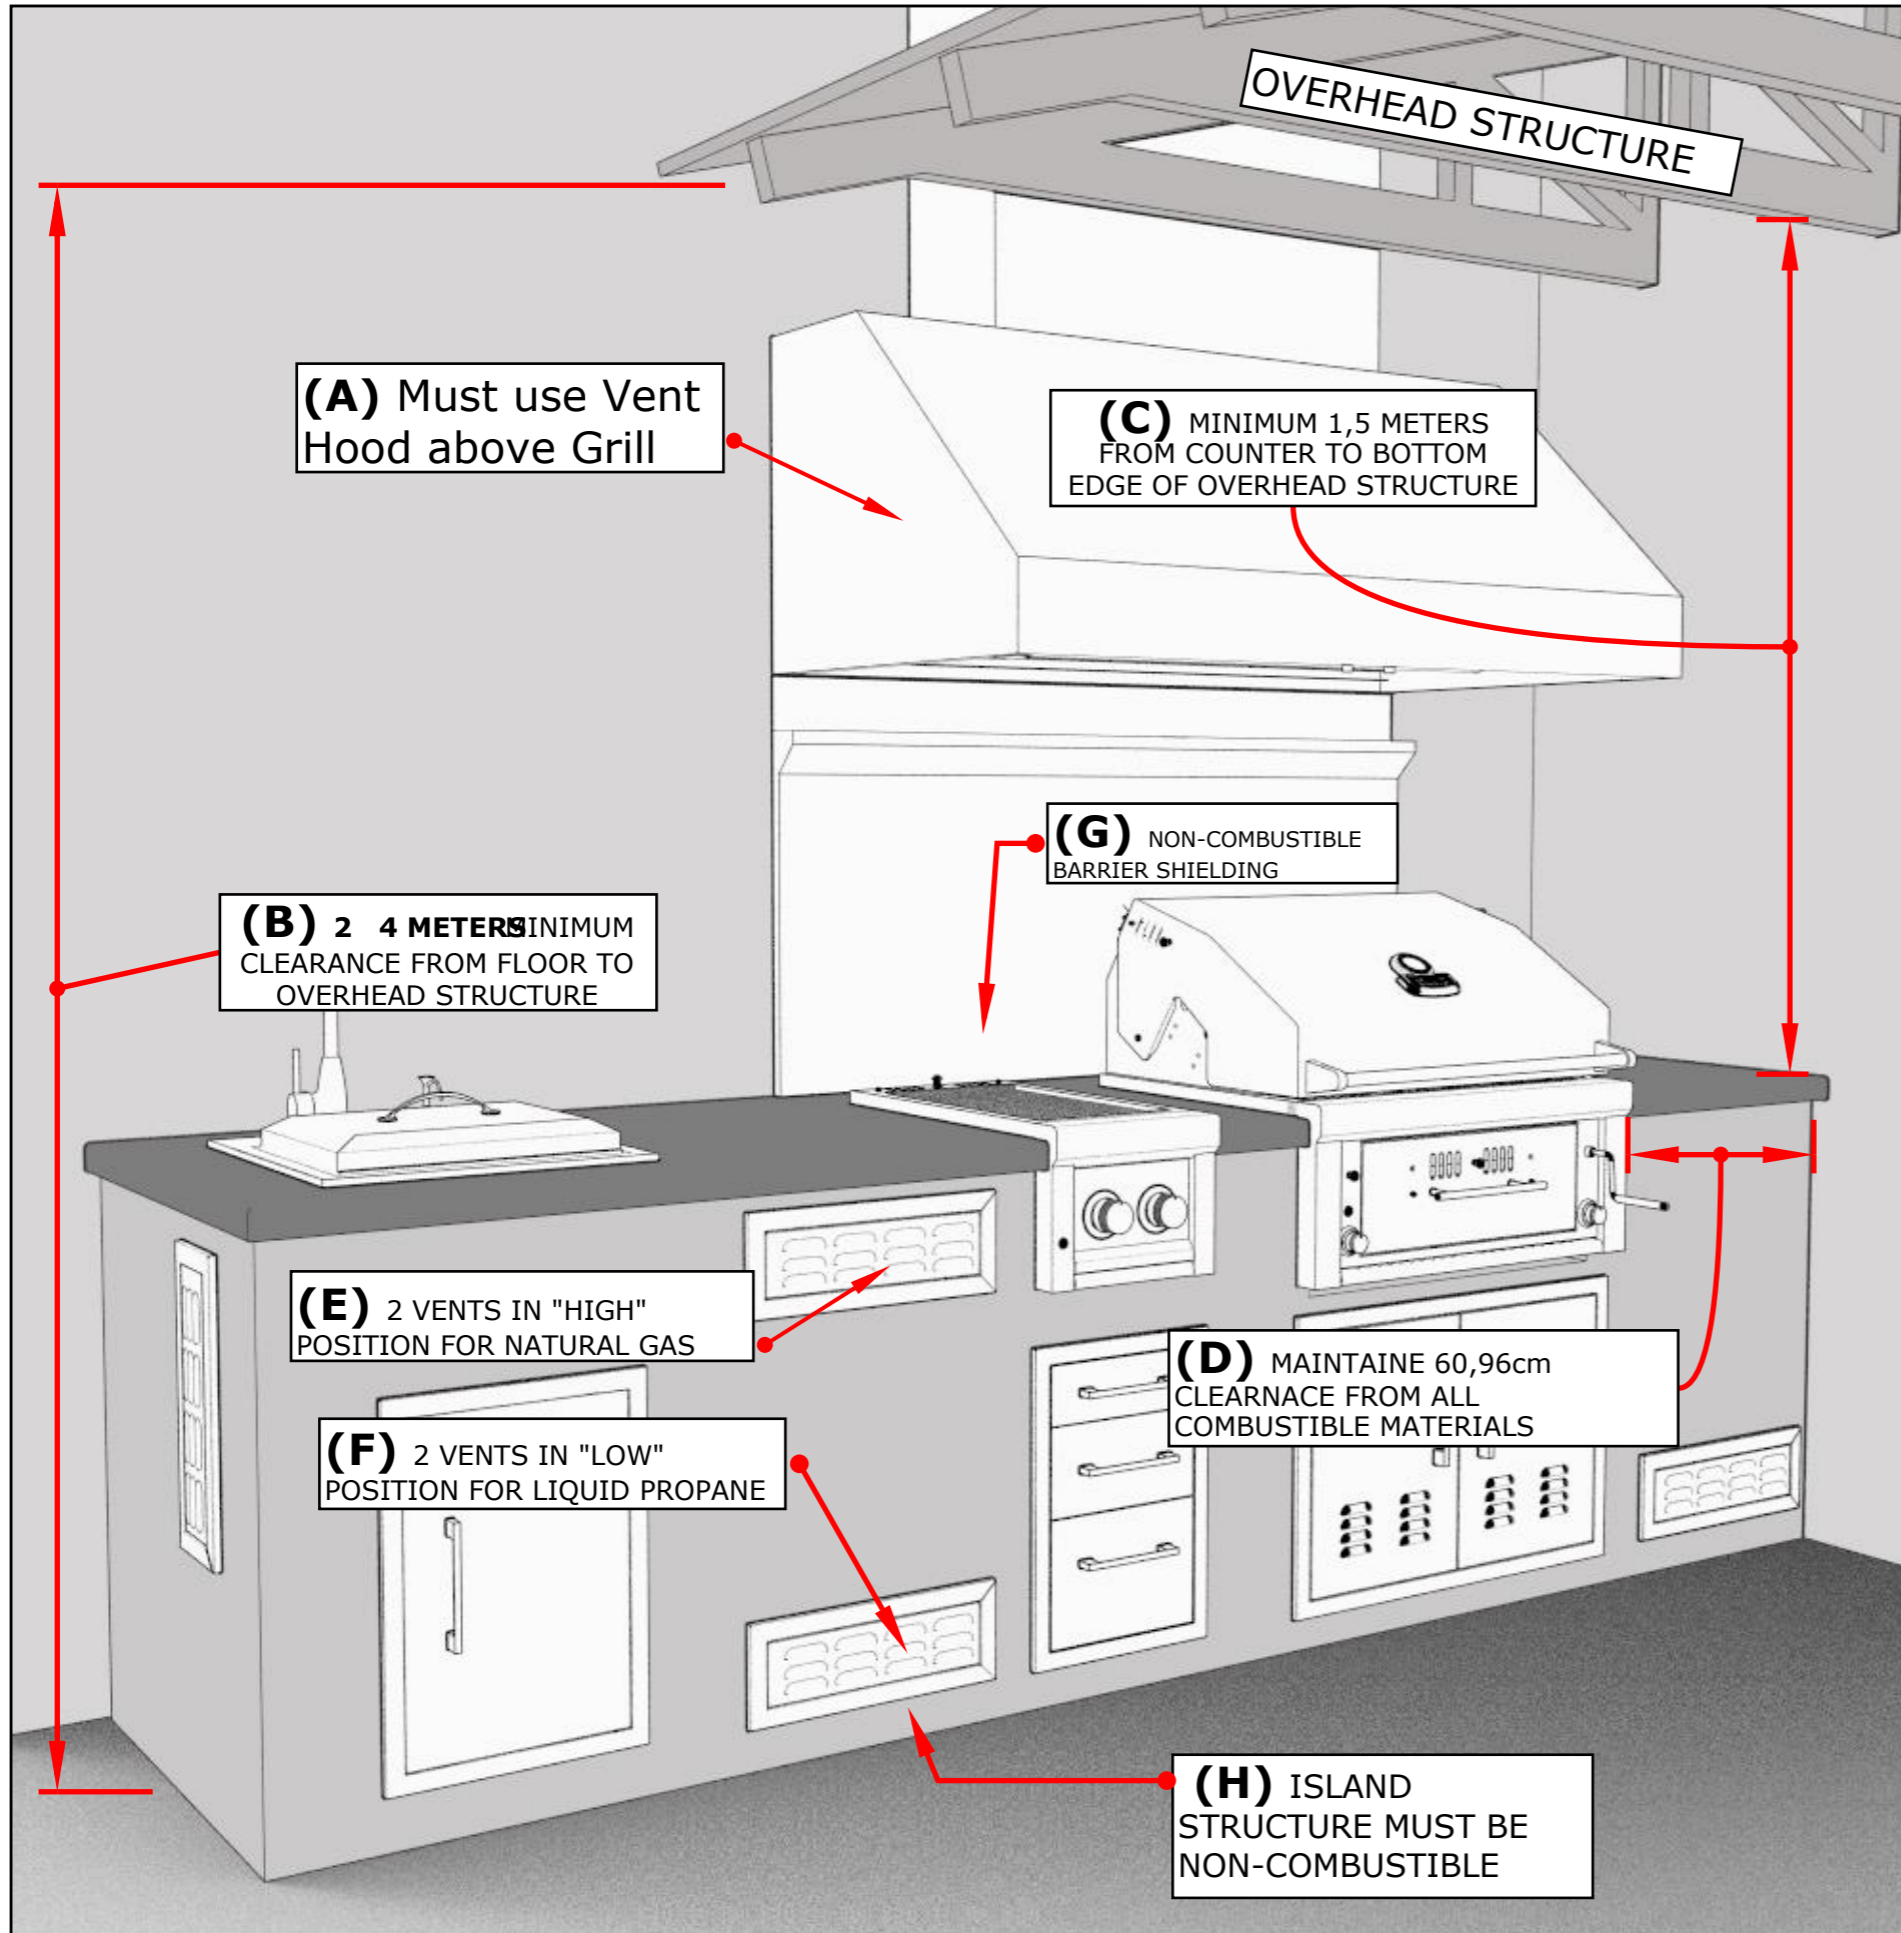

SPECIFICATIONS

A	MUST USE VENT HOOD ABOVE GRILL FOR ENCLOSED STRUCTURES	
B	MIN. CLEARANCE FROM FLOOR TO OVERHEAD STRUCTURE	2,4 METERS
C	MIN. DISTANCE FROM COUNTER TO BOTTOM OF OVERHEAD STRUCTURE	1,5 METERS
D	MINIMUM CLEARANCE FROM ALL COMBUSTIBLE MATERIALS	60,96cm
E	2 VENTS IN "HIGH" POSITION FOR NATURAL GAS	
F	2 VENTS IN "LOW" POSITION FOR LIQUID PROPANE	
G	Install Non-Combustible Barrier Shielding, Stainless Steel Sheet is recommended.	
H	ISLAND STRUCTURE MUST BE NON-COMBUSTIBLE OTHERWISE YOU MUST USE GRILL JACKET UNDER ALL GAS APPLIANCES, WE RECOMMEND SUNSTONE'S DESIGNER SERIES CABINET ISLANDS	



BODILY INJURY: Failure to maintain required clearances creates a fire hazard that may result in property damage or serious personal injury.



ATTENTION: Always take a leak test before lighting the grill to prevent a possible fire or explosion. Never store a spare propane cylinder in the vicinity of this Grill, or in the vicinity of any other potential heat source. Never attempt to attach this grill to the self-contained LP gas system. Do not use grill until leak testing.



ATTENTION: Never operate the grill unattended.



IMPORTANT: When Igniting the Grill – Always keep the cover removed.